
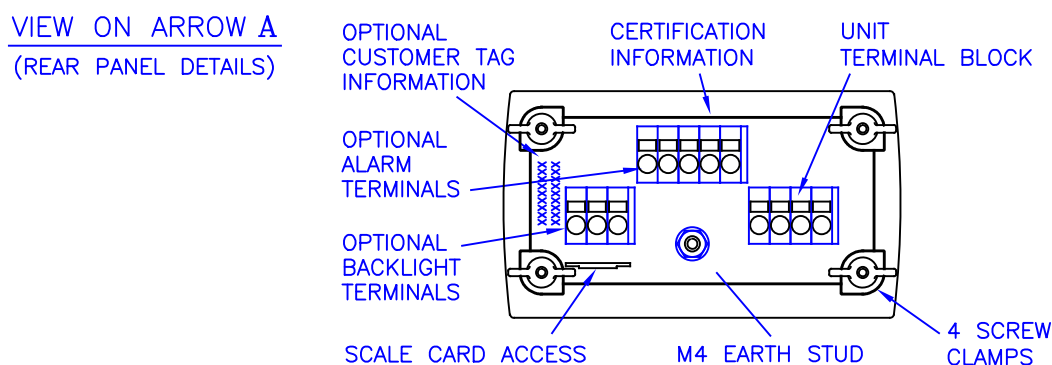
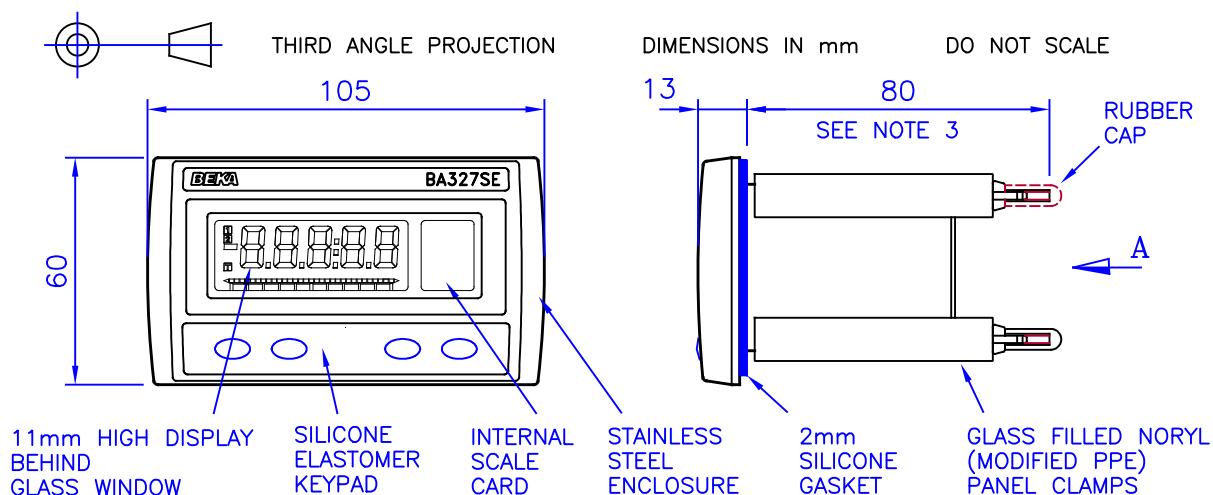


Iss.	Date	Modification	Ckd.	Appd.
1	21.09 2023	P0182. New drawing.		




**associates**  
England  
Hitchin  
company confidential, copyright reserved.

Iss.	Date	Modification	Ckd.	Appd.




### TERMINAL CONNECTIONS:

OPTION TERMINALS (WHEN OPTION FITTED):

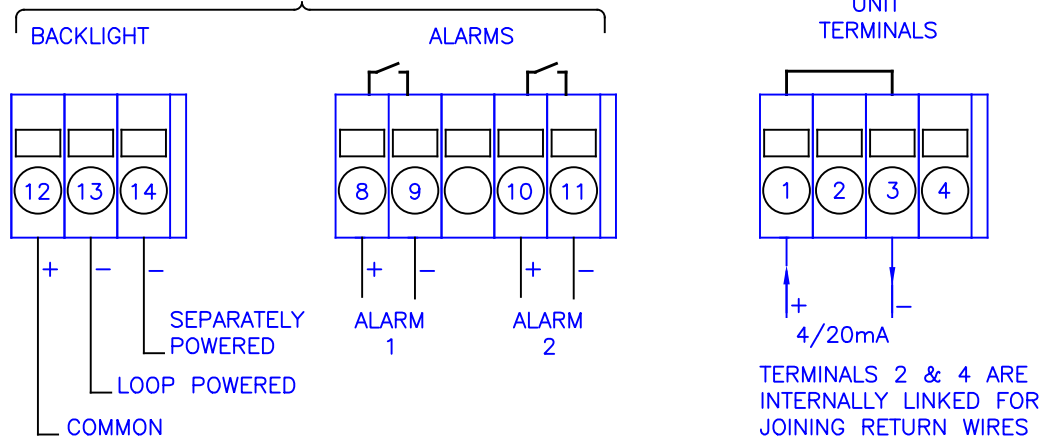

### INSTALLATION:

- 1 INSERT UNIT INTO PANEL CUTOUT FROM FRONT.
- 2 SCREW CLAMPS ARE FITTED OVER THE 4 STUDS  
& THE WING NUTS TIGHTENED FROM REAR OF PANEL.  
RECOMMENDED TORQUE 22cNm MIN.
- 3 FOR PANELS GREATER THAN 3mm THICK ADD  
ADDITIONAL DEPTH FOR CLAMPS.  
(ie ADD PANEL THICKNESS LESS 3mm)
- 4 FINALLY, FIT A SILICONE RUBBER CAP TO THE END  
OF EACH M3 THREADED ROD.

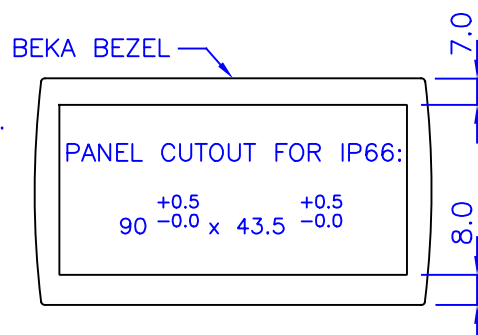

Title	CUSTOMER DRAWING for BA327SE 5 DIGIT I.S. INDICATOR IN PANEL MOUNTING ENCLOSURE	Drawn	Checked	Scale
		KB		NTS
		Drawing No. CD327SE		